

DATA SHEET: TEMBREAK 2 GS800-NE MCCB

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN. 1, AS/NZS 3947-2, NEMA AB-1


Frame reference	Quantity	Unit	Condition	TB2 1000
Max In (A) of Frame				800
Model				S800
Number of Poles				3, 4
Type				NE
Nominal current ratings				
	I_n	(A)	50°C	630 800
Electrical characteristics				
Rated operational voltage	U_e	(V)	AC 50/60 Hz DC	690 -
Rated insulation voltage	U_i	(V)		800
Rated impulse withstand voltage	U_{imp}	(kV)		8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC	20 ^①
			525V AC	30
			440V AC	50
			400/415V AC	50
			220/240V AC	85
			250V DC	-
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC	20 ^①
			525V AC	30
			440V AC	50
			400/415V AC	50
			220/240V AC	85
			250V DC	-
Rated breaking capacity (NEMA)		(kA)	480V AC 240V AC	30 85
Rated short-time withstand current	I_{cw}	(kA)	0.3 Seconds	10
Protection				
Adjustable thermal, adjustable magnetic				■
Fixed thermal, fixed magnetic				
Microprocessor				
Utilisation category				B
Installation				
Front connection (FC)				■
Extension bar (FB)				•
Cable clamp (FW)				• ^②
Rear connection (RC)				•
Plug-in (PM)				•
DIN rail mounting (DA)				-
Dimensions	height	(mm)		273
	width	(mm)	3 pole 4 pole	210 280
	depth	(mm)		103
	weight	(kg)	3 pole 4 pole	③ ④
Weight				
Operation				
Direct Opening Action				■
Toggle operation				■
Door mounted (HS) / Breaker mounted handle (HB)				•
Motor operation (MC)				•
Endurance	Electrical Mechanical	cycles cycles	690V AC	4,000 10,000

① MCCB cannot be used in IT systems at this voltage

② 630A only

③ 8.7kg 630A, 9.1kg 800A

④ 11.9kg 630A, 12.3kg 800A




DATA SHEET: TEMBREAK 2 GS800-NE MCCB


Outline Dimensions GS800-NE

ASL: Arrangement Standard Line Ht: Handle Frame Centre Line

Front connected with extension bars (optional)

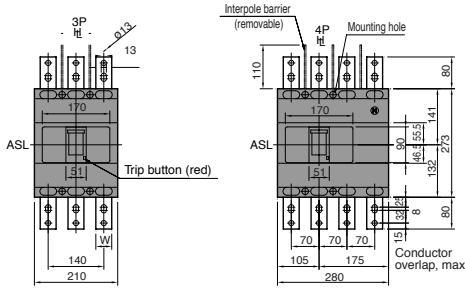


Drilling plan (front view)




Breaker Type	Rated Current	t1	t2	L1	L2	W
S800-CJ, S800-NJ	630A	8	8	32	34	40
S800-RJ, S800-NN	800A	10	10	32	35	40
S800-NE, S800-RE	630A	8	8	32	36	40
	800A	10	10	32	36	40


Rear connected



Drilling plan (front view)

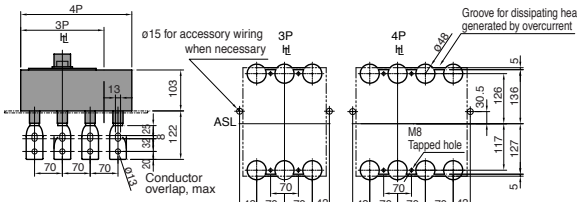


Panel cutout (front view)




Panel cutout dimensions shown give an allowance of 1.0mm around the handle escutcheon.

Note: Studs are factory installed in horizontal direction both on the line and load sides.


Front connected with Motor Operator

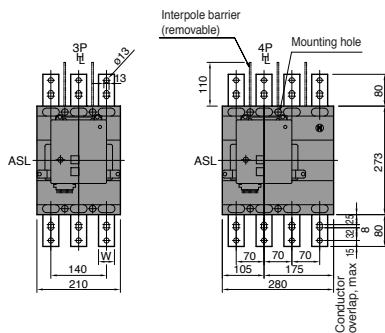

Drilling plan (front view)




Panel cutout (front view)




Panel cutout dimensions shown give an allowance of 1.5mm around motor operator.


Rear connected with Motor Operator



Drilling plan (front view)

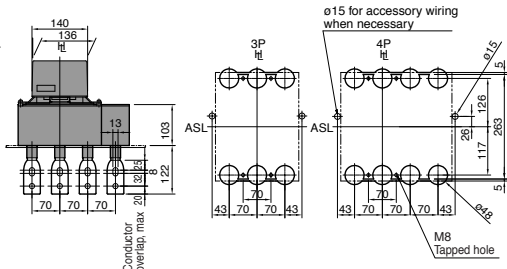

Panel hinge position (hatching area) (bottom view)




Note: Studs are factory installed in horizontal direction both on the line and load sides.

DATA SHEET: TEMBREAK 2 GS800-NE MCCB

Time/Current Characteristic Curves

GS800-NE

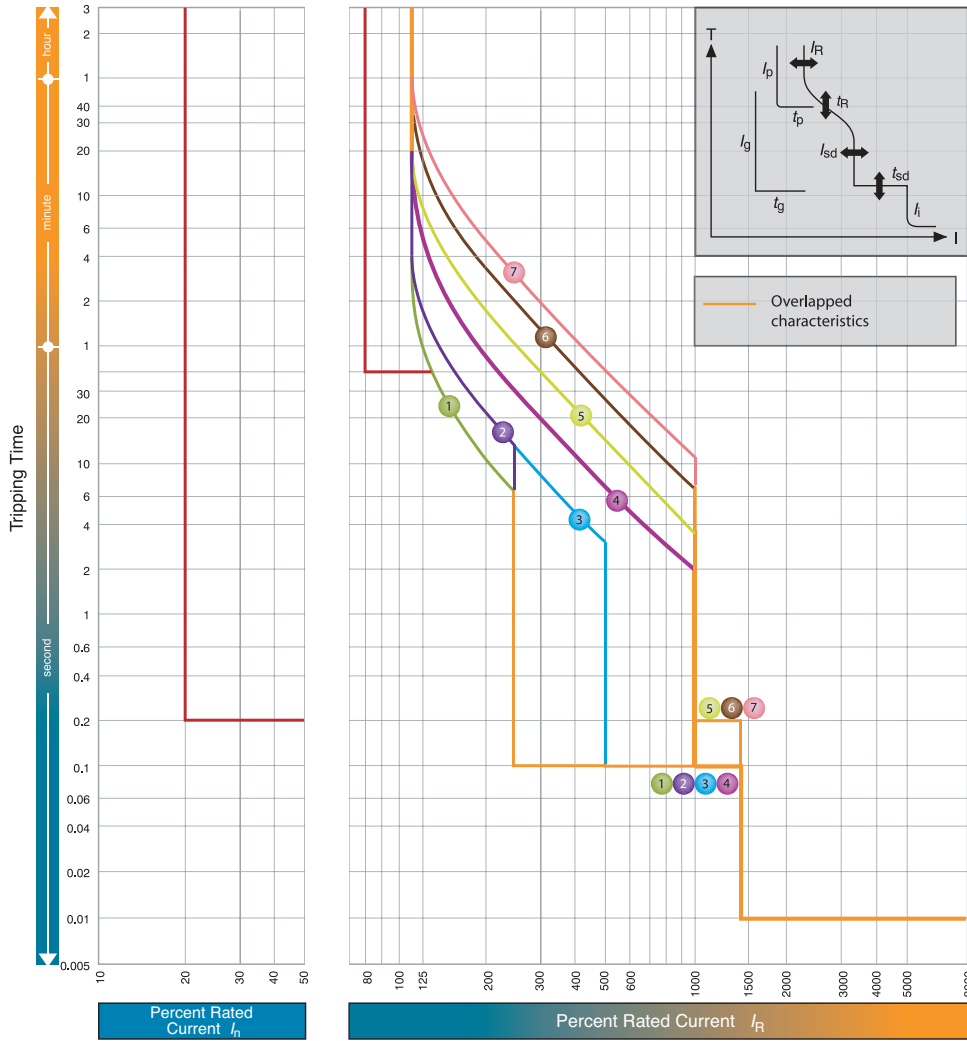

$I_n = 800A; 630A$

		I_R (A)									
		LTD Pick-up current	I_R	x/I_n	0.4	0.5	0.63	0.8	0.9	0.95	1.0
Standard	LT	t_R	(s)		11	21	21	5	10	19	29
	ST	I_{sd}	x/I_R		2.5			5			10
		t_{sd}	(s)		0.1				0.2		
	INST	I_i	x/I_n		14(Max: 12 x I_n) Note (1)						
Option	PTA	I_p	x/I_R		0.8						
		t_p	(s)		40						
	GF Note(3)	I_g	x/I_n		0.2						
		t_g	(s)		0.2						
	NP	I_N	x/I_R		1.0/0.5 Note(2)						
	t_N	(s)		$t_N = t_R$							

Note

(1) I_i max. = 12 x I_n . (2) 1.0 x I_R or 0.5 x I_R can be selected. Characteristic of neutral protection (t_N vs. I_N) is identical to characteristic of phase protection (t_R vs. I_R). (3) When you specify GF on MCCBs with 3 poles the terminal block is automatically fitted to connect with the external neutral CT for 3 phases 4 wires system. See terminal blocks in section 4.



Dokument/document Försäkran om överensstämmelse/ Declaration of conformity		Utgåva datum/edition date 2018-08-22
Avdelning/department Produkt/Product		
Ansvarig/prepared Robert Nydén	Version 5	Sida/page 1 av/of 1

Manufacturer/Tillverkare: GARO AB
Box 203
S-335 25 GNOSJÖ
Sweden

Telephone: +46 (0)370 33 28 00
Internet: www.garo.se

Agent established within EC/Ombud etablerad inom EG

Telephone:
Internet:

Agent of equipment/Materielslag: Moulded Case Circuit Breaker, MCCB/Effektbrytare, MCCB

Trade Mark/Varumärke: GARO

Type Designation/Typbeteckning: GS160SCJ , SJ ,GS400-NE,NJ, 3- and 4-pole, GS250-NE, 3- and 4-pole GS800 , GS1000-NE

We hereby declare that our product fulfils the requirements of following EC directives/

Vi intygar härmed att vår produkt uppfyller krav enligt följande EU direktiv:

- The Low Voltage Directive (LVD) 2014/35/EU / Lågspänningsdirektivet (LVD) 2014/35/EU.**
- Electromagnetic compatibility (EMC) 2014/30/EU / Elektromagnetisk kompatibilitet (EMC) 2014/30/EU.**
- Radio Equipment Directive 2014/53/EU (RED) 2014/30/EU / Radiodirektivet (RED) 2014/53/EU.**
- RoHS Directive (RoHS) 2011/65/EU / RoHS direktivet (RoHS) 2011/65/EU.**
- No electromagnetic compatibility (EMC 2014/30/EU) immunity or emission tests are required on the assembly /** Produkten innehåller inte elektroniska apparater som påverkas enligt förbehållen enligt direktivet (EMC) 2014/30/EU.

The following harmonised standards (latest edition) or technical specifications which comply with good engineering practice in safety matters in force within the EC have been used in the design:/

Följande harmoniserade standarder (senaste utgåva) eller tekniska specifikationer som uppfyller god säkerhetsteknik praxis inom EG har använts i konstruktionen: **EN 60947-1 and/och 60947-2**

- The equipment confirms completely with the above stated harmonised standards or technical specifications./**
Materielen överensstämmer helt med ovan angivna harmoniserade standarder eller tekniska specifikationer.

Or/eller

- The equipment confirms only partially with the above stated harmonised standards or technical specifications but complies with good practice in safety matters in force within the EC./**
Materielen överensstämmer endast delvis med ovan angivna harmoniserade standarder eller tekniska specifikationer, men uppfyller god säkerhetsteknik praxis inom EG.

We have product surveillance according to CENELEC's harmonised requirements, documents CCA-201.

GARO AB
Company/Företag

2018-08-22
Date/Datum

Sign/Underskrift

Product Manager/Produktchef
Position/Befattning

Robert Nydén
Sign in printed letters/Namnförtydligande